

# WENICE

Floor and Wall Tiles



## Foshan Jianqiu Ceramics Co., Ltd.

Office/Showroom Add: Ceramics International Trading Center, Shop12-13, Building C6, 168 Jihuaxi Rd., Nanzhuang Town, Chancheng District, Foshan City, Canton Prov., China 528061

Tel: +86-757-83127351 Fax: +86-757-83127951

Website: [www.jianqiu.com](http://www.jianqiu.com) / [www.wenicetile.com](http://www.wenicetile.com)

Email: [info@wenicetile.com](mailto:info@wenicetile.com).

Factory: Cenxi New Jianqiu Ceramics Co., Ltd

Address: Guwan industrial Zone, Daye Town, Cenxi City, Guangxi Prov. China.



## INTRODUCTION

**WENICE TILE**

Foshan Jianqiu Ceramics Co., Ltd is one of the leading ceramic tile manufacturers in China. We were founded in 1988; since then, we put our main focus on developing and manufacturing exterior wall tiles and floor tiles, and market our products as "Jianqiu" brand, which is well-known throughout the domestic ceramic tile market right now.

In 2010, in order to respond positively to the national implementation of "energy-saving, low-carbon, environmental-protection and sustainable-development strategy", Jianqiu Ceramics pursues the goal of a green and clean production. We setup a whole new factory in Cenxi City Guangxi Province. It is an opportunity for us to upgrade all environmental friendly production machineries and to increase production capability. Now the factory covers an area of 231,000m<sup>2</sup>, and with daily production capability of 30,000m<sup>2</sup> of tiles.

At present, Jianqiu Ceramics has extended the reach to other continents of the world with our new line of products, "WENICE" brand (Simply called Venice tiles). This new line offers product range that suits western mindset; it is with concise design, and with variety of building material selections. Venice products have been successfully exported to many countries and regions of the world, such as South Korea, Japan, Russia, the Middle East, Southeast Asia, Australia etc.

The Venice tiles consist of eight successful series of products, which contains thousands of varieties and specifications. They are Porcelain External Wall Tile, Porcelain Floor Tile, Plaza Tiles, Supermarket Tile, Tunnel Tile, Tactiles, Swimming Pool Tile and Ceramic Mosaics etc. With its rich varieties and excellent product quality, Venice tiles is identified as a favorable tile supplier by many construction companies, real estate business, government and turnkey projects.

After years of development, Venice tile has created a wealth of experience in sales and after-sales service team for foreign customers. We got the ISO9001:2008 certification. We consistently implement our quality control policy management system, continuous improvement system and customer satisfaction system. These are on-going processes that can make sure we will serve our customers better and better.



**01** Exterior wall tile  
**Unglazed series**  
3~4

**02** Exterior wall tile  
**Unglazed series**  
5~6

**03** Exterior wall tile  
**Unglazed series**  
7

**04** Porcelain floor tile  
**Plaza tile series**  
8

**05** Porcelain floor tile  
**Salt and Pepper series**  
9~10

**06** Porcelain floor tile  
**Stair tile series**  
11

**07** Porcelain floor tile  
**Supermarket tile series**  
12

# Exterior wall tile

## 250mmx40mm Unglazed series



■ AS19023A-56



■ AS17031D-56



■ GS1415C-56



■ GS17004C-56



■ GS8069B-56



■ GS8062-56



■ GS578C-56



■ GS561B-56



■ GS7025C-56



■ GS2148C-61

■ Size:

250\*40\*9mm

■ Package details:

86pcs/m<sup>2</sup>,  
100pcs/carton,  
18kg/carton,  
Carton size:255\*235\*175mm

**Application**

External wall, Internal wall, etc.

**Not-applicable**

Bathroom Floor, Internal Floor, External Floor

Test Item	Benchmark	Test Result
Water absorption	A.V. 0.5% < E < 3.3%	Approx. 1.6
Failure strength	When thickness < 7.5mm, Single Value ≥ 700N	Approx. 736N
Rupture modulus	A.V. ≥ 30Mpa	Approx. 66Mpa
Frost resistance	No cracks after testing	Passed



Model Used:  
AS17031D-56/GS2148C-61  
250x40mm

# Exterior wall tile

## 145mmx45mm/250mmx40mm Unglazed series



■ AS11010B-73



■ AS12055E-29



■ AS15012E-73



■ AS2198B-29



■ AS12031D-73



■ CS2204B-29



■ AS15015B-73



■ AS341C-53


- Size:  
145\*45\*6.5mm
- Package details:  
132pcs/m<sup>2</sup>, 152pcs/carton,  
14.5kg/carton,  
Carton size:300\*252\*97mm

- Size:  
250\*40\*9mm
- Package details:  
86pcs/m<sup>2</sup>, 100pcs/carton,  
18kg/carton,  
Carton size:255\*235\*175mm

<b>Application</b>	External wall, Internal wall, etc.
--------------------	------------------------------------

<b>Not-applicable</b>	Bathroom Floor, Internal Floor, External Floor
-----------------------	--

Test Item	Benchmark	Test Result
Water absorption	A.V. 0.5% < E < 3.3%	Approx. 1.6
Failure strength	When thickness < 7.5mm, Single Value ≥ 700N	Approx. 736N
Rupture modulus	A.V. ≥ 30Mpa	Approx. 66Mpa
Frost resistance	No cracks after testing	Passed

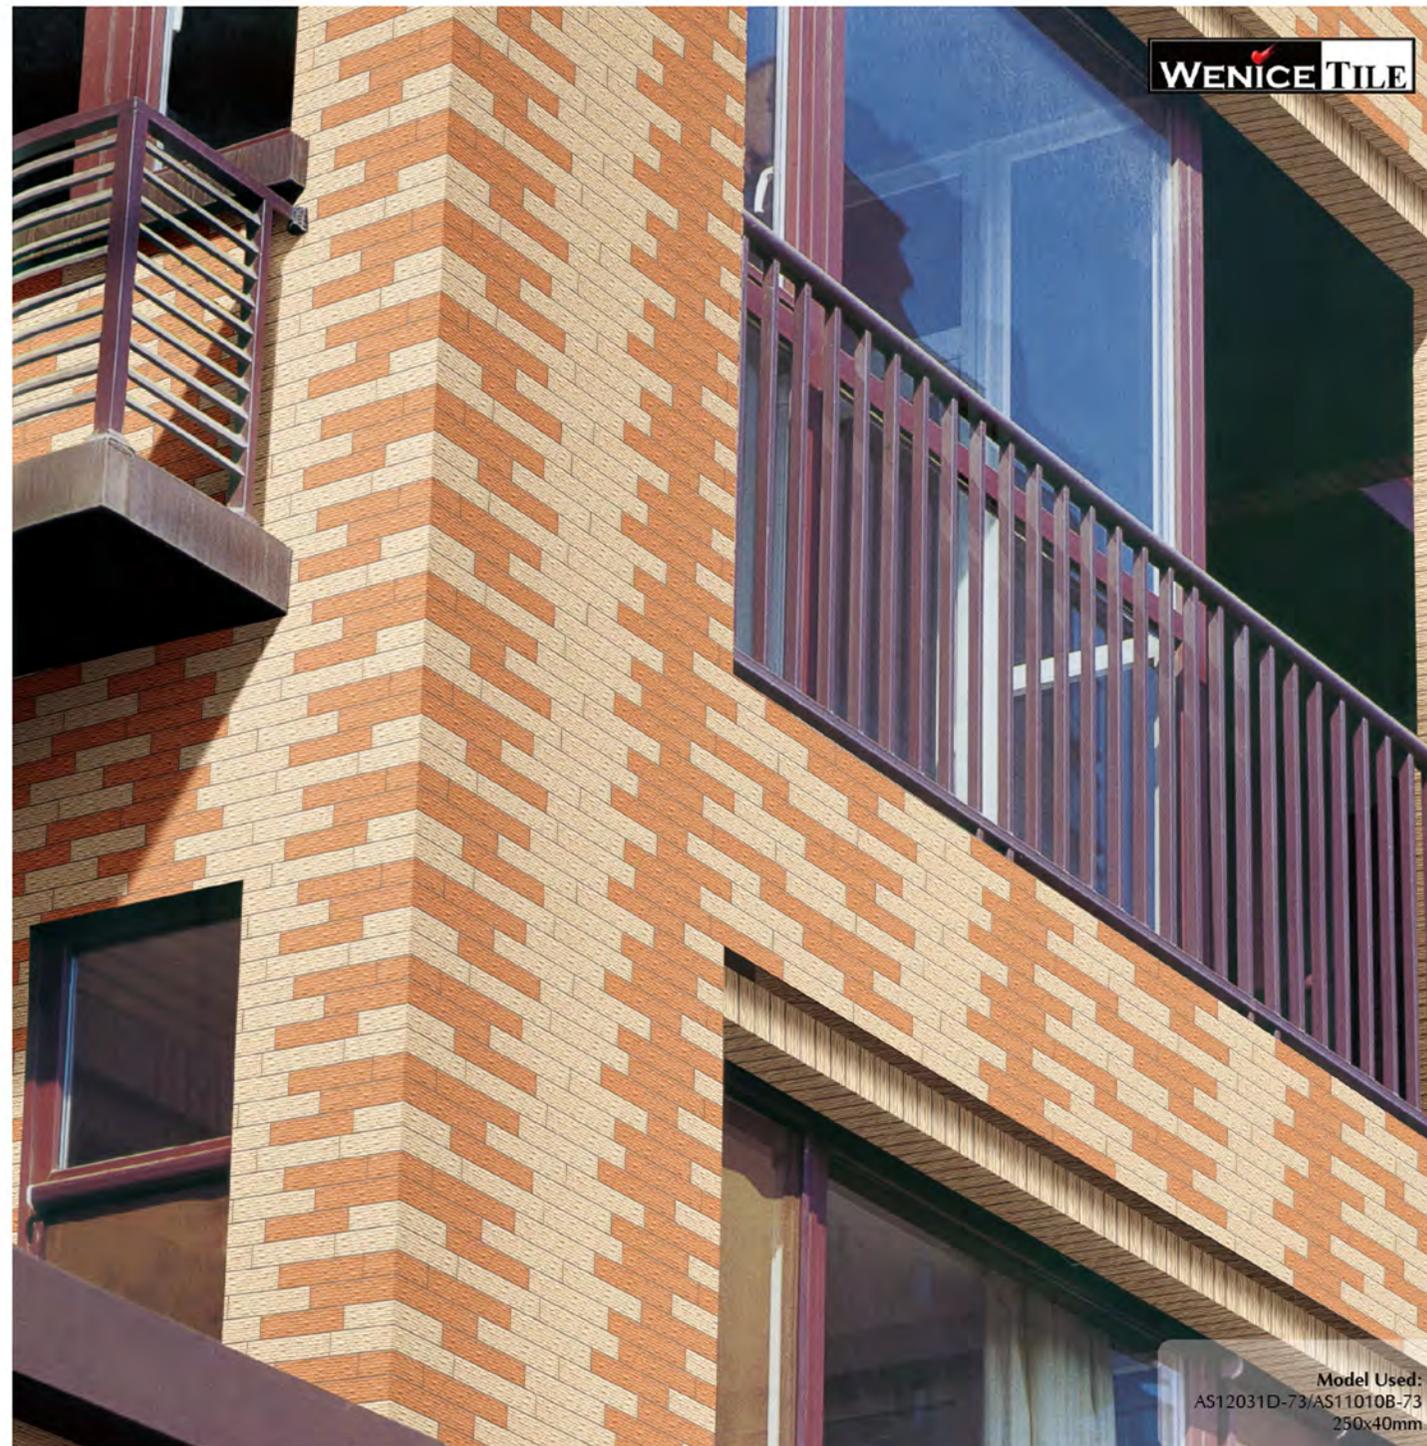

**WENICE TILE**

Model Used:  
AS12031D-73/AS11010B-73  
250x40mm

# Exterior wall tile

195mmx45mm/250mmx40mm **Unglazed series**



■ AS51A-50



■ AS779C-50



■ AS19024A-71



■ T103



■ AS12040B



■ AS12045F



■ AS15017B




■ AS18042C

- Size: 195\*45\*7mm
- Package details: 100pcs/m<sup>2</sup>, 152pcs/carton, 19kg/carton, Carton size:276\*200\*192mm

- Size: 250\*40\*9mm
- Package details: 86pcs/m<sup>2</sup>, 100pcs/carton, 18kg/carton, Carton size:255\*235\*175mm

<b>Application</b>	External wall, Internal wall, etc.
<b>Not-applicable</b>	Bathroom Floor, Internal Floor, External Floor

Test Item	Benchmark	Test Result
Water absorption	A.V. 0.5%<E<3.3%	Approx. 1.6
Failure strength	When thickness<7.5mm, Single Value>=700N	Approx. 736N
Rupture modulus	A.V. >=30Mpa	Approx. 66Mpa
Frost resistance	No cracks after testing	Passed

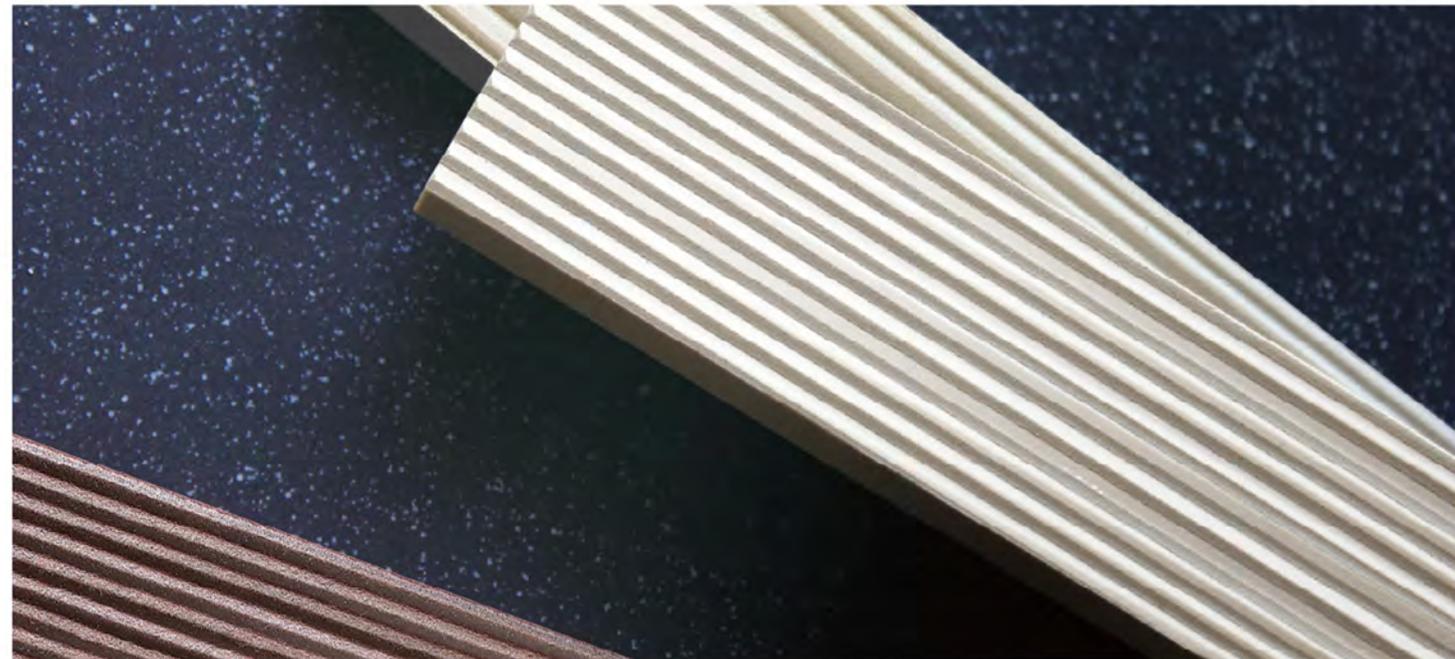

# Porcelain floor tile

200mmx200mm **Plaza tile series**



■ B3312



■ AS8072B



■ CT51A




■ 86470



■ CT18013C




■ 332150-30



■ CT112A-88



■ CT112A (方点)



■ AS29034A

- Size: 200\*200\*12mm
- Package details: 25pcs/m<sup>2</sup>, 20pcs/carton, 21kg/carton, Carton size:255\*205\*205mm

<b>Application</b>	Plaza, Park, Supermarket, etc.
<b>Not-applicable</b>	External wall, Internal wall


Test Item	Benchmark	Test Result
Water absorption	A.V. 0.5%<E<3%	Approx. 1.6
Failure strength	A.V. >1100N	Approx. 1181N
Rupture modulus	A.V. >=30Mpa	Approx. 36Mpa
Abrasion resistance	Wear volume <=175mm <sup>3</sup>	Approx. 159
Frost resistance	No cracks after testing	Passed



Model Used:  
CT112A (方点)  
200x200mm

# Porcelain floor tile

## 150mmx150mm Salt and Pepper series



■ CT112A



■ AS51A-48



■ 3EICE02




■ 86468




■ CT1417B



■ CT1998D



■ CT555B



■ CT8639B



■ CT829B

- Size: 150\*150\*8mm
- Package details: 42pcs/m<sup>2</sup>, 44pcs/carton, 17kg/carton, Carton size: 310\*190\*160mm

<b>Application</b>	Plaza, Park, Supermarket, etc.
<b>Not-applicable</b>	External wall, Internal wall

Test Item	Benchmark	Test Result
Water absorption	A.V. 0.5% < E < 3%	Approx. 1.6
Failure strength	A.V. > 1100N	Approx. 1181N
Rupture modulus	A.V. > = 30Mpa	Approx. 36Mpa
Abrasion resistance	Wear volume < = 175mm <sup>3</sup>	Approx. 159
Frost resistance	No cracks after testing	Passed



Model Used:  
3EICE02  
150x150mm

# Porcelain floor tile

## 300mmx170mm/300mmx300mm Stair tile series

- Size: 300\*170\*8mm
- Package details: 19pcs/m<sup>2</sup>, 25pcs/carton, 22kg/carton, Carton size: 315\*214\*175mm




- CT69A
- CT112A
- CT533C
- CT5330
- L364

- Size: 300\*300\*8.5mm
- Package details: 11pcs/m<sup>2</sup>, 17pcs/carton, 26kg/carton, Carton size: 314\*155\*310mm



- CT69A
- CT112A
- CT533C
- CT5330
- L364

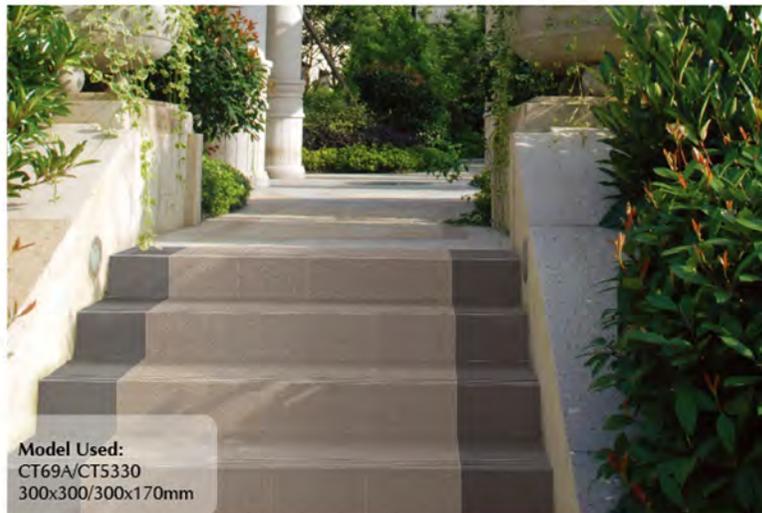

Model Used:  
CT69A/CT5330  
300x300/300x170mm



Model Used:  
CT112A/L364  
300x300/300x170mm

# Porcelain floor tile

## 300mmx300mm Supermarket tile series



- Size: 300\*300\*10mm
- Package details: 11pcs/m<sup>2</sup>, 13pcs/carton, 26kg/carton, Carton size: 314\*155\*310mm

### Application

Plaza, Park, Supermarket, etc.

### Not-applicable

External wall, Internal wall


Test Item	Benchmark	Test Result
Water absorption	A.V. 0.5% < E < 3%	Approx. 1.6
Failure strength	A.V. > 1100N	Approx. 1181N
Rupture modulus	A.V. >= 30Mpa	Approx. 36Mpa
Abrasion resistance	Wear volume <= 175mm <sup>3</sup>	Approx. 159
Frost resistance	No cracks after testing	Passed



■ CT51A



■ 2828




■ 86471



■ AS306A



■ AS3308C



■ A-1006C



■ AS363C-8



■ A-1003B



Model Used:  
A-1006C  
300x300mm

## Standard sizes for reference

Products	Models	Demensions
Porcelain exterior wall tiles	C series, CS series	48*23*5mm(sheet), 45*45*5.5/6.5mm(sheet), 73*73*5.5/6.5mm(sheet), 95*45*5.5/6.5mm(sheet), 108*60*6.5mm(sheet), 145*45*6.5mm(sheet)
	C series, CS series	195*45*7mm, 200*60*7.5mm, 235*52*7.5mm, 240*60*7.5mm
Stone-like exterior wall tiles	AS series, CT series	73*73*6.5mm, 95*45*6.5mm, 108*60*6.5mm, 145*45*6.5mm
	AS series, CT series, GS series	195*45*7mm, 200*60*7.5/9mm, 235*52*7.5mm,240*60*7.5/9mm, 250*40*9/10/13/15mm
Porcelain plaza tiles	CT series	150*150*8mm, 200*200*8/10mm, 300*300*8/10/12mm
Porcelain stair tiles	CT series	300*300*8.5mm, 300*170*8mm
Porcelain supermarket tiles	CT series	200*200*10/12mm, 300*300*10/12mm
Acid-resisting floor tiles	C series, CT series	150*150*12/15mm, 200*200*15/16mm
Special size and color can be customized.		

## Method of tile adhesive filling:

1. Good tile adhesive used could make a better performance.
2. Color of tile adhesive may be changed due to the different construction conditions like environment, climate, water amount, construction methods etc. So we suggest to make a test in a small area before construction.
3. Do not fill the gap immediately after tile paving. You can refer to the timetable below.

Working temperature	Best working time
> 26 °C	3 days later
> 18-26°C	3-7 days later
< 18°C	7 days later

4. Before filling the gap, please make ensure there were no dirty & water stain on the surface & edge.
5. For the products with high water absorption or roughness surface, we suggest to use the squeezing method to fill the gap.
6. Work should be stopped when temperature is below 30°C, or it is a rainy day or there is strong wind but no any protective measures.



Tile adhesive mixed



Coating method working



Gap filled by squeezing method



Pressing gap



Cleaning